

OPERATING INSTRUCTIONS

PRODUCT TYPE

2-ARM PULLER WITH PARALLEL CROSSARMS

MODELS

8465-0055

8465-0070

8465-0080



1. Make sure the spindle is cleaned and greased before use.
2. Make sure the axle has a centre hole. If not, use a point protector.
3. Make sure that the jaws are properly centered.
4. Apply pulling force by turning the spindle. Never hit spindle. Never use an impact wrench.
5. Don't keep the spindle too sticking out from the puller's body.
6. Maintain safety and hygiene standards at work.




Figure 1






Figure 2

The legs can be assembled crossed as in the figure 1 or opened as in figure 2.

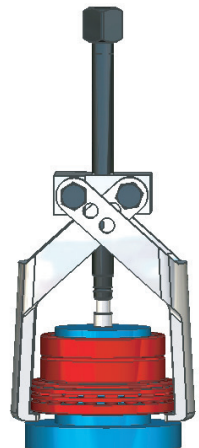

Note:

If the shaft doesn't have a centre hole, use a point protector in order to prevent possible damage for the shaft and the puller.